

C-SHOT



C-SHOT



PSHO

	B		CTA		e	GS		GC		e	i304		i316	
	mm	inch	(kg)	lb		REF.	kg/ud	REF.	kg/ud		REF.	kg/ud	REF.	kg/ud
C-SHOT 100	100	4"	105	232	1,5	2/7235	0,48	2/7244	0,52	1,5	2/7495	0,40	2/18417	0,56
C-SHOT 150	150	6"	75	166	2	2/7236	0,52	2/7245	0,55	1,5	2/7496	0,45	2/18418	0,62
C-SHOT 200	200	8"	70	155	2	2/7237	0,58	2/7246	0,62	1,5	2/7497	0,50	2/18419	0,70
C-SHOT 300	300	12"	37	82	2	2/7238	0,70	2/7247	0,75	1,5	2/7498	0,60	2/18420	0,79
PSHO	-	-	-	-	2	2/6240	0,03	2/6318	0,04	2	2/18139	0,03	2/18479	0,03

TFSO (2/0894)





1 PSHO (2/6240-GS / 2/6318-GC / 2/18139-I304 / 2/18479-I316)



B1 (2/4356-EZ / 2/6826-GC / 2/4925-I304 / 2/18388-I316)



TFSO



C-SHOT



PSHO

C-SVO



TFSO

	B		e	CTA		GS		GC		e	i304		i316	
	mm	inch		(kg)	lb	REF.	kg/ud	REF.	kg/ud		REF.	kg/ud	REF.	kg/ud
C-SVO 100	100	4"	1,5	250	552	2/3630	0,24	2/6280	0,25	1,5	2/6285	0,24	2/18421	0,24
C-SVO 150	150	6"	1,5	200	441	2/1073	0,31	2/1078	0,32	1,5	2/1087	0,31	2/18422	0,31
C-SVO 200	200	8"	2	294	649	2/1074	0,37	2/1079	0,39	1,5	2/1088	0,37	2/18423	0,36
C-SVO 300	300	12"	2	235	519	2/1076	0,43	2/1081	0,45	1,5	2/1090	0,48	2/18424	0,48
C-SVO 400	400	16"	2	161	355	2/3629	0,55	2/5719	0,57	1,5	2/6286	0,76	2/18425	0,76
C-SVO 500	500	20"	2	115	254	2/1077	0,67	2/1082	0,69	1,5	2/6287	1,04	2/18426	1,04
C-SVO 600	600	24"	2	87	192	2/5941	0,79	2/5720	0,81	1,5	2/6288	1,31	2/18427	1,31


TFSO (2/0894)



2 x DIN976 M8x1000 (2/3397-EZ / 2/6852-I304) + 4/100 x DIN6923 M8 (2/17553-EZ / 2/17555-I304))



B1 (2/4356-EZ / 2/6826-GC / 2/5392-I304 / 2/18443-I316)

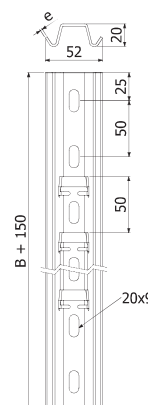

C-SHO



C-SHO 400





PSHO

	L		e	Fmáx	Mmáx	Cd	GS		GC		i304		i316	
	mm	inch		kg	kg-m	mm/kg-m	REF.	kg/ud	REF.	kg/ud	REF.	kg/ud	REF.	kg/ud
C-SHO 400	400	16"	2	147	6,8	1,91	2/7234	0,66	2/7243	0,71	2/7494	0,66	2/18416	0,66
PSHO	-	-	2	-	-	-	2/6240	0,03	2/6318	0,03	2/18139	0,30	2/18479	0,30



1 SHO + 2/100 B2 (2/6792-GC / 2/4926-EZ / 2/5392-I304 / 2/18443-I316)



C-SHO



PSHO