

Серия FT400

10-

4-




FT400

10-

- 4- 10-
-
- / 65 dB
- NTSC, PAL & SECAM
-
-
-
-
-
-

-
-
-
- /
-
-
-

10-

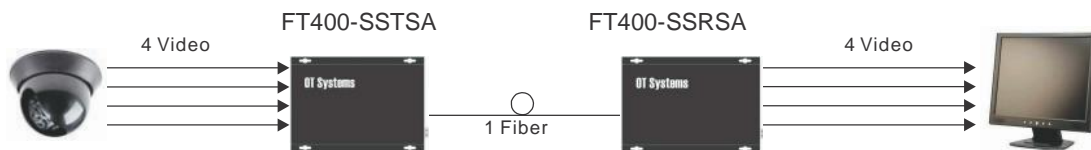

Серия FT400

10-

(62.5/125 um)				
FT400-SMT	4		1 (1310 nm)	23 dB
FT400-SMR	4			2 km
(9/125 um)				
FT400-SST	4		1 (1310 nm)	17 dB
FT400-SSR	4			40 km
FT400-SSTL	4		1 (1310 nm)	24 dB
FT400-SSRL	4			60 km

: FT-C18. 19" ()
 FT-PA/12V. +12 ()
 : 'SA', FT400-SMTSA
 ST. FC 'F'
 FT400-FMT

- (1)
- (2)
- (3)

4	SA: +12 @ 4.8
6.5M	FT-C18
PAL / NTSC / SECAM	SA: 30 x 156 x 212mm
1.0 - , 75	: 154 x 20.4 x 212
Differential Gain: < 1% typical	SA: 0.70
Differential Phase: < 1° typical	: 0.25
> 65dB	1
ST (), FC	
BNC	
SA: 2-	
	-40°C +75°C
	-40°C +85°C
	0 95%
MTBF:	> 100,000



Lifetime Warranty