

КОМПЛЕКТ ПЕРЕДАЧИ ПИТАНИЯ ПО UTP



UTP-EP01-C2

УТЕРО (Китай)

:


50 . 5/5 /6 Ethernet. , 15, 24 4,5,7,8 48 .

:

- 10/100 , 0-50 ;
- 1,2,3,6 4,5,7,8;
- , 15 , 24 , 48 ,

:

	5~60
	LAN: 10/100 /
	0-- 50
	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX
/	-0...55° / 0-95%
	25 18 190 ()
	57

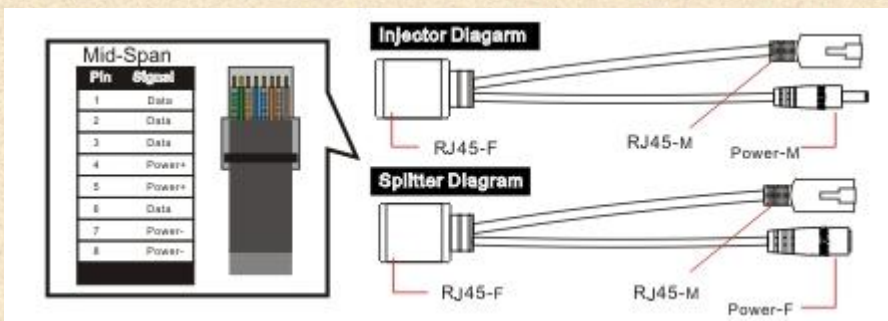

Дистанция при передача питания 15 В

Load Distance	1A	0.8A	0.5A	0.3A
10m	14.0V	14.2V	14.5V	14.7V
30m	12.0V	12.6V	13.6V	14.1V
50m	10.0V	11.0V	12.5V	13.5V

Дистанция при передача питания 24 В

Load Distance	1A	0.8A	0.5A	0.3A
10m	23.0V	23.2V	23.5V	23.7V
30m	21.0V	21.6V	22.5V	23.1V
50m	19.0V	20.0V	21.5V	22.5V

